

# RL 40/75 P1

## AIR NAILER RoofLoc® SCRAIL®

### APPLICATION

Metal Roofing to wood.

### TECHNICAL DESCRIPTION

. Code	101F58AC
. Trigger actuation	multiple
. Dimension L / W / H	370 / 110 / 450 mm
. Weight	3,90 Kg
. Magazin Capacity	30
. Nails lenght	37 - 63 - 75 mm
. Wire diameter	3,8/4,2 mm
. Operation pressure	5-8 bars
. Air consumption	1,80 l

### TYPE OF NAILS

#### ROOFLOC SCRAIL




- Wire	3.8 / 4.2 mm
- Wire head	10 mm
- Lenght	37 - 63 - 75 mm
- Material	steel or stainless steel
- Surface	Fascoat
- Packing	Plastic strip 0°
- Head	Hexagon 10
- O-ring	EPDM



code **101F58AC**

Metal roof fastening will never be the same. RoofLoc® SCRAIL® fasteners change the standard for metal roof fastening, locking down roofing - and profits - faster than ever before.

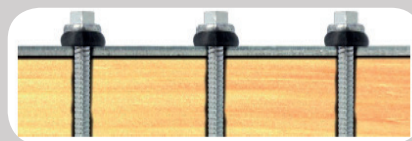

### ADVANTAGES

- 2 x faster as collated screws
- 8 x faster as loose screws
- Exceeds 1.750 Newton in holding power
- Collated SCRAIL strips eliminate fastener waste
- FasCoat finish for improved corrosion resistance
- Leakproof EPDM - washer

### CONTACT

**ALSAFIX**  
CS 60023 - 114a rue Principale - F-67240 GRIES  
Tel. : +33 3 88 72 42 41 - Fax : +33 3 88 72 17 15  
[alsafix@alsafix.com](mailto:alsafix@alsafix.com) - [www.alsafix.com](http://www.alsafix.com)

**ALSAFIX**  
[www.alsafix.com](http://www.alsafix.com)