

CLOUAGE

POINTE BR

DESIGNATION


Pointe de finition brads 26°






COMPATIBILITE

DB - FN

APPLICATION

Agencement, menuiserie, plancher, escalier




REFERENCE	DESIGNATION				PCS A FIXER	 (N)*	 (N)*	CLASSE EUROCODE 5
6BR322	Brads BR-18/32	3 655	14 620	8	11	123	137	1 (galva)
6BR382	Brads BR-18/38	3 655	14 620	9	13	146	137	1 (galva)
6BR442	Brads BR-18/44	3 655	14 620	15	15	169	137	1 (galva)
6BR502	Brads BR-18/50	3 655	14 620	18	17	192	137	1 (galva)
6BR572	Brads BR-18/57	3 655	14 620	19	19	219	137	1 (galva)
6BR642	Brads BR-18/64	3 655	14 620	20	21	246	137	1 (galva)
6BR449	Brads BR-18/44	3 655	14 620	15	15	169	137	3 (inox)

APPAREILS

BR 64 P1



32 mm - 64 mm

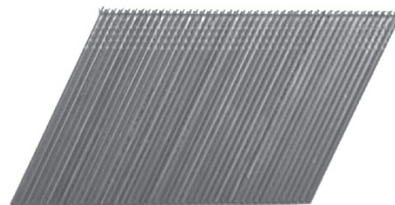

* Sous réserve de modifications. Informations données à titre indicatif, Alsafix ne serait être tenu responsable en cas de mise en oeuvre sans calcul et essais préalables propres à chaque cas.

CONTACT

ALSAFIX
 CS 60023 - 114a rue Principale - F-67240 GRIES
 Tel. : +33 3 88 72 42 41 - Fax : +33 3 88 72 17 15
 alsafix@alsafix.com - www.alsafix.com

